

**PLDE 107 prisma**

**Inbouw - Einbau**  
**Recessed - Encastré**

**1x PL-S 7 Watt**

Lampvoet - Fassung  
 Lampholder - Douille

**G 23**

Ø 158 mm

Ook verkrijgbaar met - Auch zu liefern mit - Also available with - Egalement disponible avec:

■ **HF voorschakelapp.**  
 HF Vorschaltgerät - Electronic ballast - Balast HF


(Afwijkende maten - Abweichende Abmessungen - Varied dimensions - Dimensions différentes)



**PLDE 107 opaal**




Maattekening - Abmessung  
 Format - Dessin coté



PLDE 107 prisma/opaal

r(ceiling)	70	80	80	50	50	80	80	80	80	50	30	0
r(wall)	50	50	30	50	30	80	50	30	50	30	30	0
r(work)	20	30	30	30	30	10	10	10	10	10	10	0
Room index	Utilization factors for ceiling mounted luminaires											
.6	23	24	20	23	19	34	23	19	22	19	19	15
.8	29	31	26	29	25	38	29	25	28	25	24	21
1.0	33	35	30	33	29	41	33	29	31	28	28	25
1.25	38	40	35	37	34	44	37	33	35	32	32	29
1.5	41	43	39	40	37	46	39	36	38	35	35	32
2.0	44	47	43	44	41	48	42	39	41	38	38	35
2.5	46	50	47	46	44	49	44	42	43	41	40	37
3.0	48	53	49	48	46	50	46	44	44	43	42	39
4.0	50	55	52	50	48	51	47	45	46	44	43	41
5.0	51	56	54	51	49	51	48	47	47	45	44	42

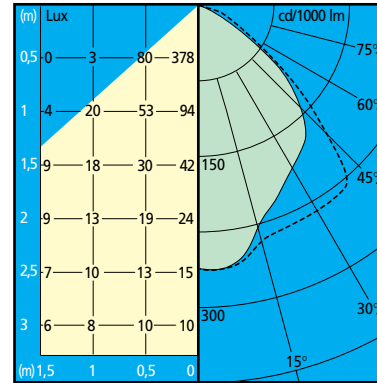

**Class I, IP 44**

**PLDE 107 prisma**  
 Output ratio 47,3%  
 Spreading angle 48,1°

**PLDE 107 prisma**  
 — C = 0 of 180°  
 --- C = 90 of 270°