

PLDE 109 prisma

Inbouw - Einbau
Recessed - Encastré

1x PL-S 9 Watt

Lampvoet - Fassung
Lampholder - Douille

G 23

Ø 192 mm

Ook verkrijgbaar met - Auch zu liefern mit - Also available with - Egalement disponible avec:

■ **HF voorschakelapp.**
HF Vorschaltgerät - Electronic ballast - Balast HF


(Afwijkende maten - Abweichende Abmessungen - Varied dimensions - Dimensions différentes)



PLDE 109 opaal




Maattekening - Abmessung
Format - Dessin coté



PLDE 109 prisma/opaal

r(ceiling)	70	80	80	50	50	80	80	80	80	50	30	0
r(wall)	50	50	30	50	30	80	50	30	50	30	30	0
r(work)	20	30	30	30	30	10	10	10	10	10	10	0
Room index	Utilization factors for ceiling mounted luminaires											
.6	17	18	15	17	14	25	17	14	16	14	14	12
.8	22	23	19	21	19	28	21	19	21	18	18	16
1.0	24	26	22	24	22	30	24	21	23	21	21	18
1.25	28	29	26	28	25	32	27	25	26	24	24	22
1.5	30	32	29	30	27	33	29	27	28	26	26	24
2.0	32	35	32	32	30	35	31	29	30	28	29	26
2.5	34	37	34	34	32	36	33	31	31	30	30	28
3.0	35	39	36	35	34	36	34	32	33	31	31	29
4.0	36	40	38	37	35	37	35	33	33	32	32	30
5.0	37	41	39	37	36	37	35	34	34	33	33	31

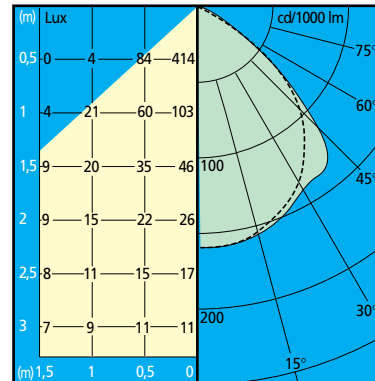

PLDE109 prisma
Output ratio 34,1%
Spreading angle 47,7°

PLDE109 prisma
— C = 0 of 180°
--- C = 90 of 270°

Class I, IP 44