

OCAB Downlights - PLDE 209 prisma/opaal
2x PL-S 9 Watt vertical

PLDE 209 prisma

Inbouw - Einbau
Recessed - Encastré

2x PL-S 9 Watt

Lampvoet - Fassung
 Lampholder - Douille

G 23

Ø 192 mm

Ook verkrijgbaar met - Auch zu liefern mit - Also available with - Egalement disponible avec:

■ **HF voorschakelapp.**
 HF Vorschaltgerät - Electronic ballast - Balast HF


(Afwijkende maten - Abweichende Abmessungen - Varied dimensions - Dimensions différentes)



PLDE 209 opaal




Maattekening - Abmessung
 Format - Dessin coté



PLDE 209 prisma/opaal

r(ceil)	70	80	80	50	50	80	80	80	50	50	30	0
r(wall)	50	50	30	50	30	80	50	30	50	30	30	0
r(work)	20	30	30	30	30	10	10	10	10	10	10	0
Room index	Utilization factors for ceiling mounted luminaires											
.6	17	18	15	17	14	23	17	14	16	14	14	12
.8	21	22	19	21	18	27	20	18	20	18	18	15
1.0	24	25	22	24	21	29	23	21	22	20	20	18
1.25	27	28	26	27	25	30	26	24	25	23	23	21
1.5	29	31	28	29	27	32	28	26	27	25	25	23
2.0	31	33	31	31	29	33	30	28	29	27	27	25
2.5	33	35	33	33	31	34	31	30	30	29	29	27
3.0	34	37	35	34	33	34	32	31	31	30	30	28
4.0	35	38	37	35	34	35	33	32	32	31	31	29
5.0	26	39	38	36	35	35	34	33	33	32	31	30

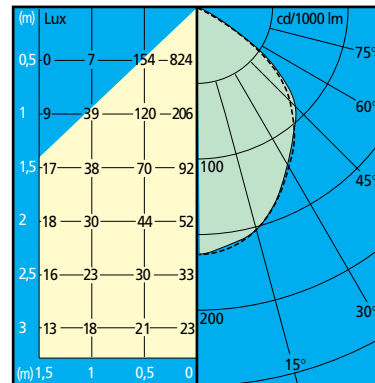

PLDE 209 prisma
 Output ratio 33%
 Spreading angle 46,9°

PLDE109 prisma
 — C = 0 of 180°
 --- C = 90 of 270°

Class I, IP 44