

PLDE 118 prisma

Inbouw - Einbau
Recessed - Encastré

1x PL-C 18 Watt

Lampvoet - Fassung
 Lampholder - Douille

G 24d2

Ø 192 mm

Ook verkrijgbaar met - Auch zu liefern mit - Also available with - Egalement disponible avec:

- **1x 13 Watt (G24d1)**
 PLDE 113 prisma/opaal
- **1x 26 Watt (G24d3)**
 PLDE 126 prisma/opaal
- **HF voorschakelapp.**
 HF Vorschaltgerät - Electronic ballast - Balast HF
- **HF dimbaar vsa**
 HF Vorschaltgerät für Lichtsteuerung - Electronic ballast for dimming - Ballast HF graduable
- **Noodunit**
 Notlicht - Emergency unit
 Unité de secours

(Afwijkende maten - Abweichende Abmessungen - Varied dimensions - Dimensions différentes)


Class I, IP 44



PLDE 118 opaal




Maattekening - Abmessung
 Format - Dessin coté



PLDE 118 prisma/opaal

| r(ceiling) | 70 | 80 | 80 | 50 | 50 | 80 | 80 | 80 | 50 | 50 | 30 | 0 |
|------------|--|----|----|----|----|----|----|----|----|----|----|----|
| r(wall) | 50 | 50 | 30 | 50 | 30 | 80 | 50 | 30 | 50 | 30 | 30 | 0 |
| r(work) | 20 | 30 | 30 | 30 | 30 | 10 | 10 | 10 | 10 | 10 | 10 | 0 |
| Room index | Utilization factors for ceiling mounted luminaires | | | | | | | | | | | |
| .6 | 17 | 17 | 14 | 17 | 14 | 23 | 16 | 14 | 16 | 14 | 14 | 11 |
| .8 | 21 | 22 | 19 | 21 | 18 | 27 | 20 | 18 | 20 | 18 | 17 | 15 |
| 1.0 | 23 | 25 | 22 | 23 | 21 | 28 | 23 | 21 | 22 | 20 | 20 | 18 |
| 1.25 | 27 | 28 | 25 | 27 | 24 | 30 | 26 | 24 | 25 | 23 | 23 | 21 |
| 1.5 | 29 | 30 | 28 | 29 | 26 | 32 | 28 | 26 | 27 | 25 | 25 | 23 |
| 2.0 | 31 | 33 | 31 | 31 | 29 | 33 | 30 | 28 | 29 | 27 | 27 | 25 |
| 2.5 | 32 | 35 | 33 | 32 | 31 | 34 | 31 | 30 | 30 | 29 | 28 | 27 |
| 3.0 | 34 | 37 | 35 | 34 | 32 | 34 | 32 | 31 | 31 | 30 | 30 | 28 |
| 4.0 | 35 | 38 | 36 | 35 | 34 | 35 | 33 | 32 | 32 | 31 | 30 | 29 |
| 5.0 | 35 | 39 | 38 | 36 | 35 | 35 | 34 | 33 | 33 | 32 | 31 | 30 |

PLDE 118 prisma
 Output ratio 32,7%
 Spreading angle 47,4°

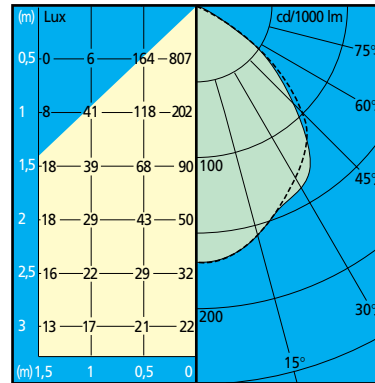

PLDE118 prisma
 — C = 0 of 180°
 --- C = 90 of 270°