

PLDE 218 prisma

Inbouw - Einbau
Recessed - Encastré

2x PL-C 18 Watt

Lampvoet - Fassung
 Lampholder - Douille

G 24d2

Ø 192 mm

Ook verkrijgbaar met - Auch zu liefern mit - Also available with - Egalement disponible avec:

- **2x 13 Watt (G24d1)**
 PLDE 213 prisma/opaal
- **2x 26 Watt (G24d3)**
 PLDE 226 prisma/opaal
- **HF voorschakelapp.**
 HF Vorschaltgerät - Electronic ballast - Balast HF
- **HF dimbaar vsa**
 HF Vorschaltgerät für Lichtsteuerung - Electronic ballast for dimming - Ballast HF graduable
- **Noodunit**
 Notlicht - Emergency unit
 Unité de secours

(Afwijkende maten - Abweichende Abmessungen - Varied dimensions - Dimensions différentes)


Class I, IP 44



PLDE 218 opaal




Maattekening - Abmessung
 Format - Dessin coté



PLDE 218 prisma/opaal

r(ceiling)	70	80	80	50	50	80	80	80	50	50	30	0
r(wall)	50	50	30	50	30	80	50	30	50	30	30	0
r(work)	20	30	30	30	30	10	10	10	10	10	10	0
Room index	Utilization factors for ceiling mounted luminaires											
.6	15	16	13	15	13	21	15	13	15	13	12	11
.8	19	20	17	19	17	24	19	16	18	16	16	14
1.0	21	23	20	21	19	26	21	19	20	18	18	16
1.25	24	26	23	24	22	28	24	22	23	21	21	19
1.5	26	28	25	26	24	29	25	23	24	23	23	21
2.0	28	30	28	28	26	30	27	25	26	25	24	23
2.5	29	32	30	30	28	31	28	27	27	26	26	24
3.0	31	33	32	31	29	31	29	28	28	27	27	26
4.0	32	35	33	32	31	31	30	29	29	28	28	26
5.0	32	36	34	32	31	32	31	30	30	29	29	27

PLDE 218 prisma
 Output ratio 29,8%
 Spreading angle 46,8°

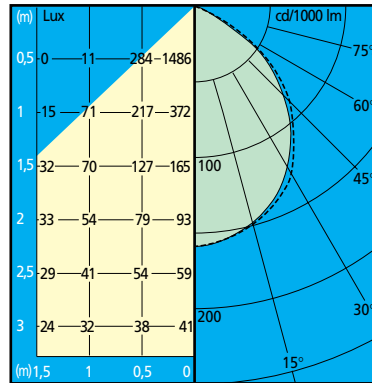

PLDE 218 prisma
 — C = 0 of 180°
 --- C = 90 of 270°