



OCAB Downlights - PLGDE 226 prisma/opaal
2x PL-C 26 Watt horizontaal

PLGDE 226 prisma

Inbouw - Einbau
Recessed - Encastré

2x PL-C 26 Watt

Lampvoet - Fassung
 Lampholder - Douille

G 24d3

Ø 260 mm

Ook verkrijgbaar met - Auch zu liefern mit - Also available with - Egalement disponible avec:

■ **3x 26 Watt (G24d3)**

PLGDE 326 prisma/opaal

■ **HF voorschakelapp.**

HF Vorschaltgerät - Electronic ballast - Balast HF

■ **HF dimbaar vsa**

HF Vorschaltgerät für Lichtsteuerung - Electronic ballast for dimming - Ballast HF graduable

■ **Noodunit**

Notlicht - Emergency unit
 Unité de secours


(Afwijkende maten - Abweichende Abmessungen - Varied dimensions - Dimensions différentes)



PLGDE 226 opaal




Maattekening - Abmessung
 Format - Dessin coté



PLGDE 226 prisma/opaal

r(ceiling)	70	80	80	50	50	80	80	80	80	50	30	0
r(wall)	50	50	30	50	30	80	50	30	50	30	30	0
r(work)	20	30	30	30	30	10	10	10	10	10	10	0
Room index	Utilization factors for ceiling mounted luminaires											
.6	13	13	11	12	10	18	12	10	12	10	10	8
.8	15	16	14	15	13	21	15	13	15	13	13	11
1.0	17	18	16	17	15	22	17	15	16	15	14	13
1.25	20	21	18	20	18	24	19	17	18	17	17	15
1.5	21	23	20	21	19	24	21	19	20	18	18	16
2.0	23	25	22	23	21	25	22	20	21	20	19	17
2.5	24	26	24	24	22	26	23	21	22	21	20	19
3.0	25	27	25	25	23	27	24	22	23	22	21	19
4.0	26	28	26	26	24	27	24	23	23	22	22	20
5.0	26	29	27	26	25	27	25	24	24	23	22	20

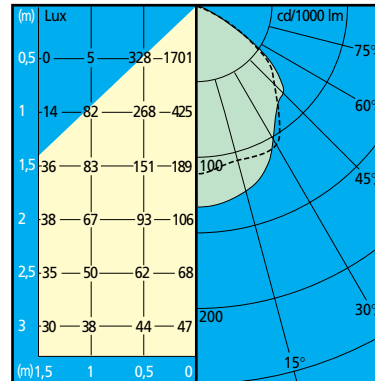

PLGDE 226 prisma
 Output ratio 22,5%
 Spreading angle 47,1°

PLGDE 226 prisma
 — C = 0 of 180°
 --- C = 90 of 270°

