



4.10.01

Downlight accessoires PCE TURBO 214 - PLGE TURBO 290

PCE TURBO 214


Turbo schoepenvormig spiegelraster voor PLC(T) downlights

Turbo Spiegelraster für PLC(T) downlights

Turbo louvre for PLC(T) downlights

Ecran faible luminance en forme d'aube pour PLC(T) spots

Ø 214 mm

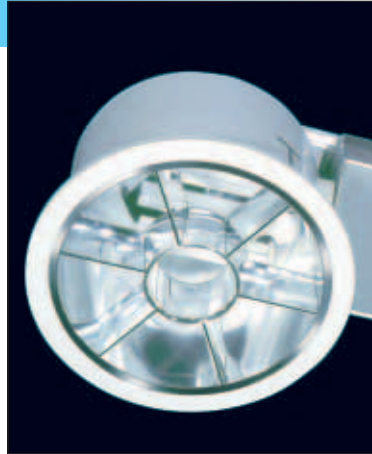


*Toepasbaar bij:
Zu gebrauchen bei:
Useble:
Applicable avec:*

Horizontaal

- PLE 109 - PLE 209
- PLCE 113 - PLCE 213
- PLCE 118 - PLCE 218
- PLCE 126 - PLCE 226
- PLTE 118
- PLTE 126
- PLTE 132
- PLTE 142

r(ceiling)	70	80	80	50	50	80	80	80	50	50	30	0
r(wall)	50	50	30	50	30	80	50	30	50	30	30	0
r(work)	20	30	30	30	30	10	10	10	10	10	10	0
Room index	Utilization factors for ceiling mounted luminaires											
.6	28	29	25	28	24	39	28	24	27	23	23	20
.8	35	37	32	35	31	45	35	31	34	30	30	27
1.0	40	42	37	40	36	48	39	35	38	35	34	31
1.25	45	48	43	45	41	51	44	40	42	39	39	36
1.5	48	52	47	48	45	53	47	44	45	43	42	39
2.0	52	56	52	52	49	55	50	47	48	46	45	42
2.5	55	59	56	55	52	56	52	50	51	49	48	45
3.0	57	62	59	57	55	58	54	52	52	51	50	48
4.0	58	64	62	59	57	58	56	54	54	53	52	49
5.0	60	66	64	60	59	59	57	56	55	54	53	50

PLTE 126 + Turbo
Output ratio 56,5%
Spreading angle 46,8°

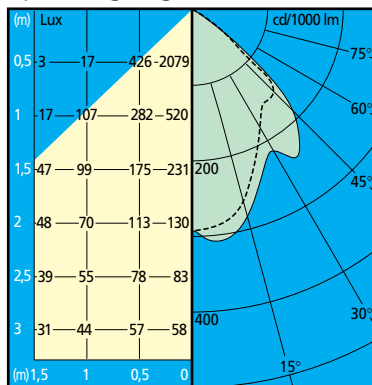

PLTE 126 + Turbo
— C = 0 of 180°
--- C = 90 of 270°

PLGE TURBO 290

Turbo schoepenvormig spiegelraster voor PLC(T) downlights

Turbo Spiegelraster für PLC(T) downlights

Turbo louvre for PLC(T) downlights

Ecran faible luminance en forme d'aube pour PLC(T) spots

Ø 290 mm


r(ceiling)	70	80	80	50	50	80	80	80	50	50	30	0
r(wall)	50	50	30	50	30	80	50	30	50	30	30	0
r(work)	20	30	30	30	30	10	10	10	10	10	10	0
Room index	Utilization factors for ceiling mounted luminaires											
.6	22	23	20	22	19	30	22	19	21	19	18	16
.8	27	29	25	27	24	34	27	24	26	24	23	21
1.0	31	32	29	30	28	36	30	27	29	27	26	23
1.25	34	36	33	34	32	38	33	31	32	30	30	27
1.5	36	39	36	36	34	40	36	34	34	32	32	29
2.0	39	42	39	39	37	41	38	36	36	35	34	31
2.5	41	44	42	41	39	42	39	38	37	36	35	33
3.0	42	46	44	42	41	43	41	39	39	38	37	35
4.0	43	48	46	43	42	43	41	40	39	39	38	35
5.0	44	49	47	44	43	43	42	41	40	39	38	36

*Toepasbaar bij:
Zu gebrauchen bei:
Useble:
Applicable avec:*

Horizontaal

- PLGE 226
- PLGE 326
- PLGTE 226
- PLGTE 232
- PLGTE 242

PLGTE 242 + Turbo
Output ratio 41,8%
Spreading angle 40,9°

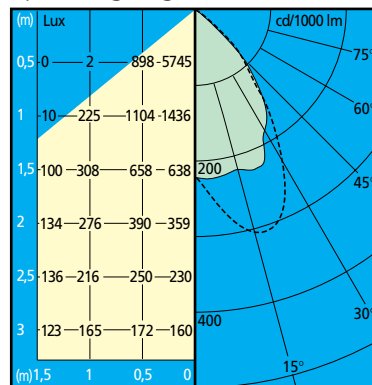

PLTE 242 + Turbo
— C = 0 of 180°
--- C = 90 of 270°