



4.10.02

Downlight accessoires

Asym. Wall Washer 214 - Darkcone 214 refl.

ASYM. WALL WASHER 214

Asymmetrische spiegelreflector voor PLC(T) downlights

Asymmetrischer Spiegelraster für PLC(T) downlights

Asymmetric mirror reflector for PLC(T) downlights

Réfecteur à miroir asymétrique pour PLC(T) spots

Ø 214 mm

Toepasbaar bij:
Zu gebrauchen bei:
Useble:
Applicable avec:


Horizontaal

- PLE 109 - PLE 209
- PLCE 113 - PLCE 213
- PLCE 118 - PLCE 218
- PLCE 126 - PLCE 226
- PLTE 118
- PLTE 126
- PLTE 132
- PLTE 142



r(ceiling)	70	80	80	50	50	80	80	80	50	50	30	0
r(wall)	50	50	30	50	30	80	50	30	50	30	30	0
r(work)	20	30	30	30	30	10	10	10	10	10	10	0
Room index	Utilization factors for ceiling mounted luminaires											
.6	35	36	29	34	28	51	34	28	33	28	27	22
.8	44	46	38	43	37	58	43	37	41	36	36	31
1.0	50	53	45	49	44	62	49	43	47	42	41	36
1.25	57	60	53	56	51	67	55	50	53	49	48	43
1.5	61	65	59	61	56	69	59	54	57	53	52	48
2.0	66	71	65	66	61	72	64	59	61	58	57	52
2.5	70	76	70	70	66	75	67	63	65	62	61	56
3.0	73	80	74	73	69	76	70	66	67	65	63	59
4.0	75	83	78	76	72	77	72	69	69	67	65	61
5.0	77	85	81	78	74	78	73	71	71	68	67	63

PCE 126 + Wall Washer
Output ratio 70,2%
Spreading angle 48°

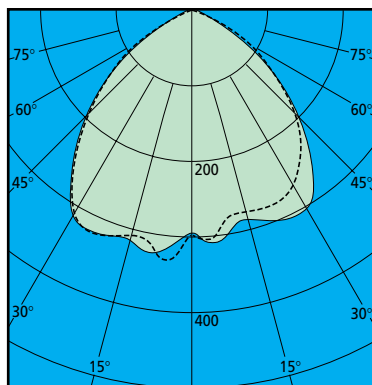


PCE 126 + Wall Washer
— C = 0 of 180°
--- C = 90 of 270°



r(ceiling)	70	80	80	50	50	80	80	80	50	50	30	0
r(wall)	50	50	30	50	30	80	50	30	50	30	30	0
r(work)	20	30	30	30	30	10	10	10	10	10	10	0
Room index	Utilization factors for ceiling mounted luminaires											
.6	21	21	19	20	18	26	20	18	20	18	17	16
.8	24	26	23	24	22	29	24	22	23	21	21	19
1.0	27	29	26	27	25	31	27	25	25	24	23	22
1.25	30	32	29	30	28	33	29	28	28	27	26	24
1.5	32	34	32	32	30	34	31	29	30	28	28	26
2.0	34	36	34	33	32	35	32	31	31	30	29	28
2.5	35	38	36	35	34	36	34	33	32	31	31	29
3.0	36	40	38	36	35	36	35	34	33	32	32	30
4.0	37	41	39	37	36	37	35	34	34	33	32	31
5.0	38	42	40	38	37	37	36	35	34	34	33	31

PLCE 218 + Darkcone
Output ratio 35,3%
Spreading angle 36,7°

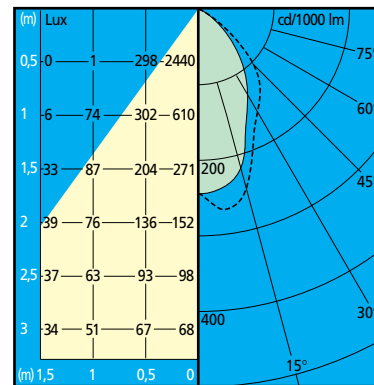

PLCE 218 + Darkcone
— C = 0 of 180°
--- C = 90 of 270°

DARKCONE 214

Darkcone spiegelreflector voor PLC(T) downlights

Darkcone Spiegelreflector für PLC(T) downlights

Dark cone mirror reflector for PLC(T) downlights

Réfecteur à miroir à cône sombre pour PLC(T) spots

Ø 214 mm

Toepasbaar bij:
Zu gebrauchen bei:
Useble:
Applicable avec:

Horizontaal

- PLE 109 - PLE 209
- PLCE 113 - PLCE 213
- PLCE 118 - PLCE 218
- PLCE 126 - PLCE 226
- PLTE 118
- PLTE 126
- PLTE 132
- PLTE 142